




"THE OB COMPANY OF CHOICE"


Unit 4 Matrix Park
900 Coronation Road
Park Royal
London NW10 7PH

www.ctvob.co.uk
tel +44 (0) 20 8453 8989
info@ctvob.co.uk

CTV OB 1 HD PHOTO AND MONITOR STACK

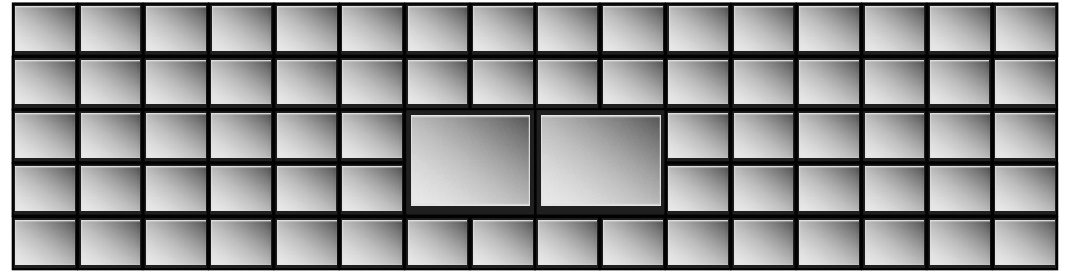

CTV OB 1 HD LAYOUT

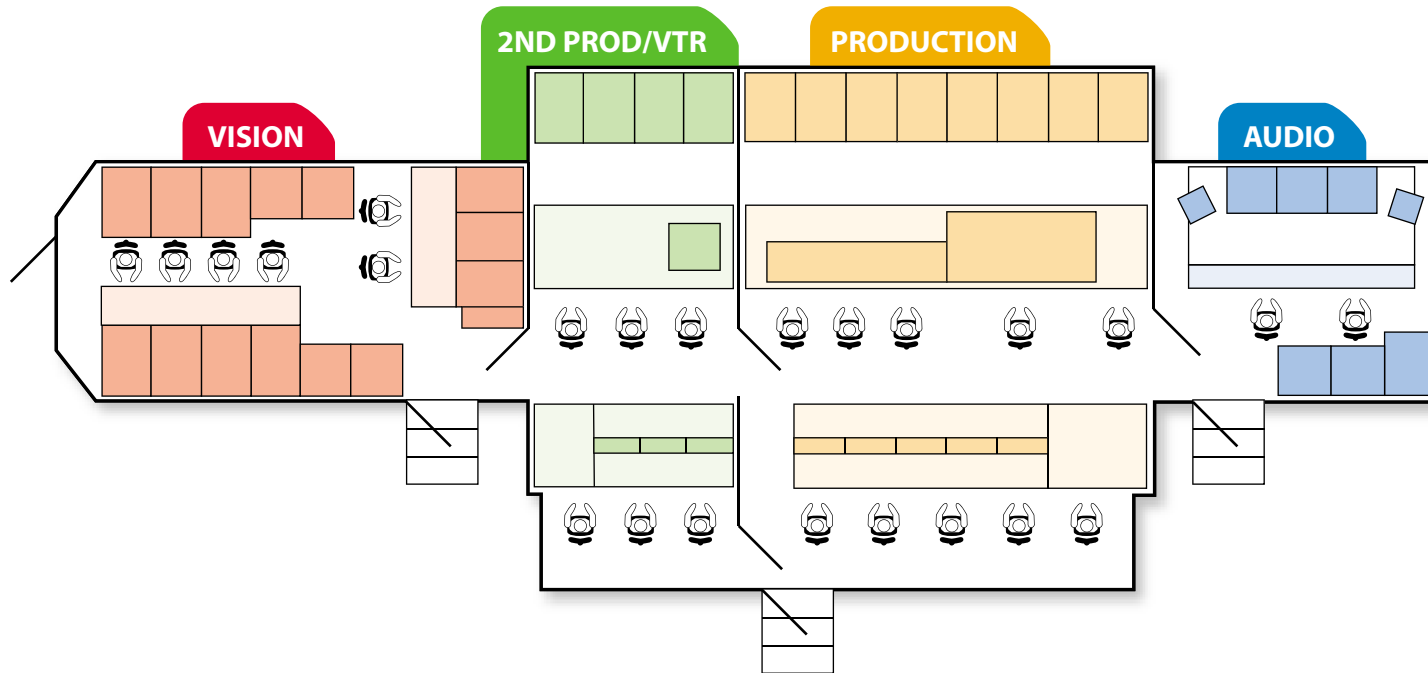



"THE OB COMPANY OF CHOICE"

Unit 4 Matrix Park
900 Coronation Road
Park Royal
London NW10 7PH

www.ctvob.co.uk
tel +44 (0) 20 8453 8989
info@ctvob.co.uk

CTV OB 1 HD SPECIFICATION

GENERAL

Category:

Extra Large

Maximum of Cameras:

16

Name of the Truck:

CTV OB 1 HD

Vehicle Type (Semi-trailer/ Coach):

Expanding Trailer

Length with Tractor:

16,50 meter

Length without Tractor:

13,60 meter

Height:

4,00 meter

Width:

2,40 meter

Width when expanded:

6,00 meter

Weight:

38 tonnes

Voltage:

380/415 & 220/240 volt

Connector Type:

CEE 125 Amp 5 Pin or 3 x 125 Amp 3 pin

PRODUCTION

Vision Mixer:

GVG KAYAK HD/SD 3M/E

Inputs (direct and 2nd Layer):

96 (50 wired)

Aux Buses:

48

DVE / Channels:

4 x iDPM (Mixer Integrated)

Miscellaneous options:

EVS Shot Box / Abekas Clipstore with

Lance Controller

GVG Kayak Satellite Mixer Panel on

Request

Monitors front:

18 x Vutrix 23" HD LCD Quad Display

Monitors rear:

10 x JVC 10" CRT

VISION

Cameras:

Sony HDC1500

Formats:

1080i 50 or 59.94 (60) Hz

1080P 23.97(24) or 25 or 29.97(30) Hz

720P 50 or 59.94 (60) Hz

Highspeed Cameras:

Sony HDC3300, Arri Hi-Motion, X-Mo on request

Lenses available:

Canon 11x, 14x, 22x, 72x, 86x as required

SD Wireless Cameras:

as HD

Video Matrix:

Probel Cygnus HD 144 x 264 Multiformat

Video Matrix Analoge:**Synchronisers:**

8 x Up/Down Converter Synchroniser

Monitors Vision:

4 x JVC 17" HD CRT Grade 1

VTR

Maximum Positions:

10 (4 wired for EVS XT)

Type VTR / VDR:

any HD or SD Format as required

Monitors front:

3 x NEC 40" - each with VIP12 Dynamic

Displays

Monitors rear:

3 x NEC 40" - each with VIP12 Dynamic

Displays

Edit:

Finat Cut pro on Request

Avid on request

SOUND

Audio Mixer Type:

Calrec Artemis BlueFin

Inputs/Outputs:

48 Faders - 12 Layers each with

Independent A/B Level

96 Mic/Line Analogue I/O

96 AES I/O

MADI/HYDRA

Surround Capabilities:

5.1 metering and surround monitor module

RTW

Effects Type:

Neve/DBX/BSS, other types on request

Speakers:

Genelec 8050 (5.1 setup)

Monitors Audio:

2 x HD

Record/Replay:

CD

Spot On Playback Hard Disc (upon request)

Shortcut (upon request)

Audio Matrix Type:

Calrec H20 router

Type Multitrack Recording:

upon request

Communication Matrix:

Telex CS Edit 64 x 64

IFB System:

6x RTS 2 ch. System

Beltpack:

20 x RTS 2 Channel

External Panels:

Minimum 2 x KP12, More upon request

ISDN Codec Interfaces:

Systembase upon request

Wireless:

3 x Duplex UHF basestations

Radio's TX/RX:

Minimum 12 x Motorola GP340 - More upon request